


注記

NOTES:

- 材料(MATERIAL)
 ウェハー : ポリアミド, UL94V-0 (色: アイボリー)
 WAFER: POLYAMIDE, UL94V-0 (COLOR: IVORY)
 ピン: □0.635 黄銅、銅下地錫めっき
 PIN: □0.635 BRASS, TIN OVER COPPER PLATING
 △2 6極以上に適合。
 TO BE APPLIED FOR 6 CKT. AND ABOVE.
 △3 5極以下はロック部スリットなし。
 NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

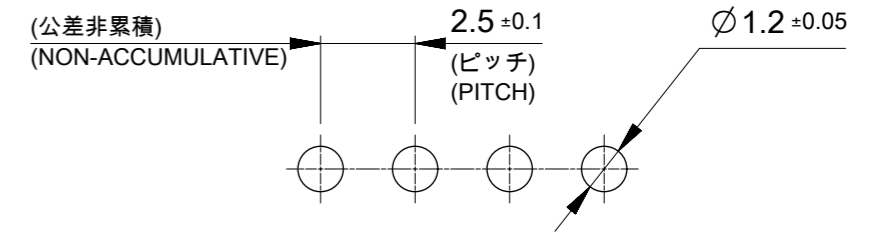

基板取付穴推奨寸法
 RECOMMENDED P.C. BOARD HOLE DIM.

1.35	0.85	35	35	22041151	5045-15A	15
1.35	0.85	32.5	32.5	22041141	5045-14A	14
1.35	0.85	30	30	22041131	5045-13A	13
1.35	0.85	27.5	27.5	22041121	5045-12A	12
1.35	0.85	25	25	22041111	5045-11A	11
1.35	0.85	22.5	22.5	22041101	5045-10A	10
1.35	0.85	20	20	22041091	5045-09A	9
1.35	0.85	17.5	17.5	22041081	5045-08A	8
1.35	0.85	15	15	22041071	5045-07A	7
1.35	0.85	12.5	12.5	22041061	5045-06A	6
1.35	0.85	10	10	22041051	5045-05A	5
1.35	0.85	7.5	7.5	22041041	5045-04A	4
1.2	1	5	5	22041031	5045-03A	3
1.2	1	2.5	2.5	22041021	5045-02A	2
(D)	(C)	(B)	(A)	ORDER NO.	ENG. NO.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED							
mm		5:1		 MINI-LATCH 2.5 HEADER ASSEMBLY VT WITH LOCK TIN PLATING PRODUCT CUSTOMER DRAWING							
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL ± 3.0°											
4 PLACES ± 0.4		EC NO: 758980									
3 PLACES ± 0.4		DRWN: HHUSSIN 2023/07/18									
2 PLACES ± 0.4		CHK'D: SAKIYAMA 2024/03/13									
1 PLACE ± 0.4		APPR: AIDA 2024/03/14		INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE DOC PART REVISION	
0 PLACES ± 0.4		DRWN: KKOHAMA 2000/03/27		SD-5045-NA				PSD		001 N	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	
				A3-SIZE		5045		SEE CHART		GENERAL MARKET	
DOCUMENT STATUS		P1		RELEASE DATE		2024/03/14		04:01:03		SHEET NUMBER	
										1 OF 1	