

DC/DC Converter

B03_XT-1WR3 Series

MORNSUN®

1W isolated DC-DC converter

Fixed input voltage, unregulated single output



Continuous Short
Circuit Protection

Patent Protection



UL 62368-1



EN 62368-1



BS EN 62368-1



IEC 62368-1



RoHS

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 12mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 84%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out

B03_XT-1WR3 series are designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
		Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.		
UL/EN/BS EN/IEC	B0303XT-1WR3	3.3 (2.97-3.63)	3.3	303/30	73/77	2400
	B0305XT-1WR3		5	200/20	78/82	2400
	B0309XT-1WR3		9	111/11	80/84	1000
EN/BS EN	B0312XT-1WR3		12	83/8	80/84	560
	B0315XT-1WR3		15	67/7	80/84	560
	B0324XT-1WR3		24	42/4	80/84	220

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3VDC input	3.3VDC output	--	394/12	416/--	mA
		5VDC output	--	370/12	389/--	
		9VDC/12VDC/15VDC/24VDC output	--	361/12	379/--	
Reflected Ripple Current*			--	30	--	
Surge Voltage (1sec. max.)			-0.7	--	5	VDC
Input Filter			Capacitance filter			
Hot Plug			Unavailable			

Note: *Reflected ripple current testing method please refer to *DC-DC Converter Application Note* for specific operation.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curve (Fig. 1)			
Linear Regulation	Input voltage change: ±1%	3.3VDC output	--	--	±1.5	--
		5VDC/9VDC/12VDC/15VDC/24VDC output	--	--	±1.2	
Load Regulation	10%-100% load	3.3VDC output	--	15	20	%
		5VDC output	--	10	15	
		9VDC/12VDC/15VDC output	--	8	15	
		24VDC output	--	6	15	
Ripple & Noise*	20MHz bandwidth		--	50	100	mVp-p
Temperature Coefficient	Full load		--	±0.02	--	%/°C
Short-circuit Protection			Continuous, self-recovery			

Note:* The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.07-A/1

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$, (see Fig. 2)	-40	--	105	$^{\circ}\text{C}$
Storage Temperature		-55	--	125	
Case Temperature Rise	$T_a=25^{\circ}\text{C}$	--	25	--	
Storage Humidity	Non-condensing	5	--	95	%RH
Reflow Soldering Temperature*		Peak temp. $T_c \leq 245^{\circ}\text{C}$, maximum duration time $\leq 60\text{s}$ over 217°C			
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	--	220	--	kHz
MTBF	MIL-HDBK-217F@ 25°C	3500	--	--	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 1			

Note: * See also IPC/JEDEC J-STD-020D.1.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	13.20 x 11.40 x 7.25 mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$, Contact $\pm 6\text{kV}$ perf. Criteria B

Typical Characteristic Curves

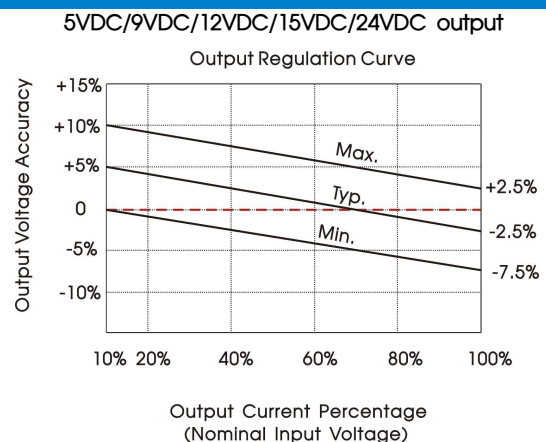
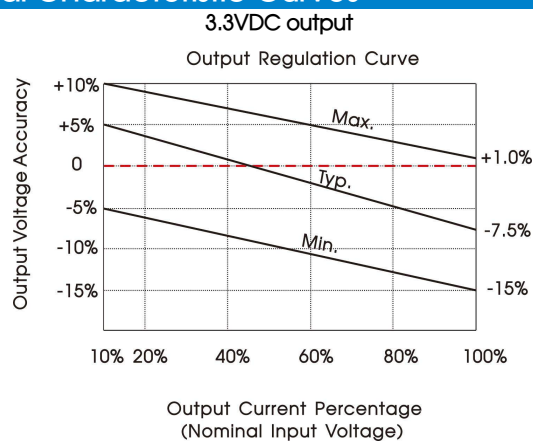


Fig. 1



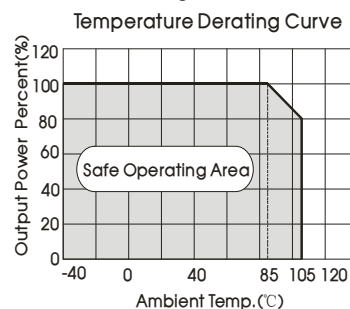


Fig. 2

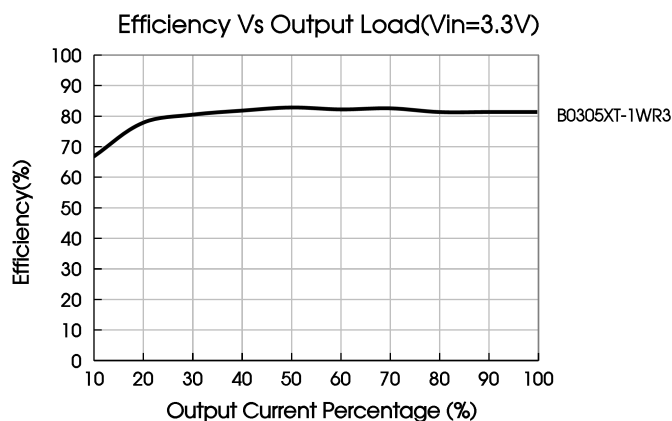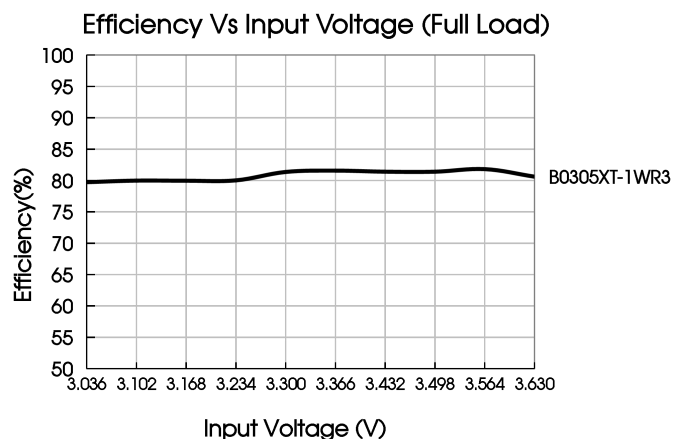

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

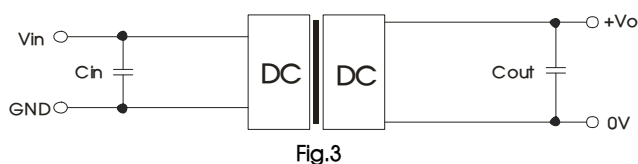


Fig.3

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
3.3VDC	4.7μF/16V	3.3VDC	10μF/16V
--	--	5VDC	10μF/16V
--	--	9VDC	4.7μF/16V
--	--	12VDC	2.2μF/25V
--	--	15VDC	1μF/25V
--	--	24VDC	0.47μF/50V

2. EMC compliance circuit

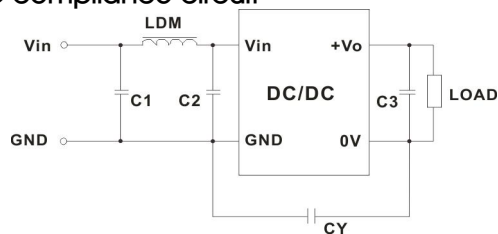


Fig. 4


Emissions	C1, C2	4.7μF /16V
	C3	Refer to the Cout in Fig. 3
	CY	270pF/2kV
	LDM	6.8μH

3. For additional information, please refer to DC-DC converter application notes on


www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

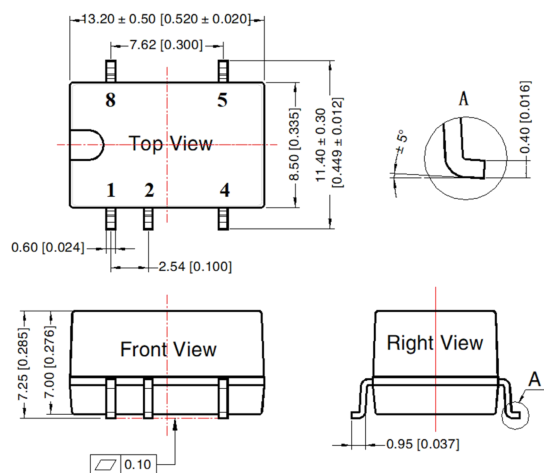

Note:
Unit: mm[inch]
Pin section tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.25 [± 0.010]




Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Tape and Reel Info

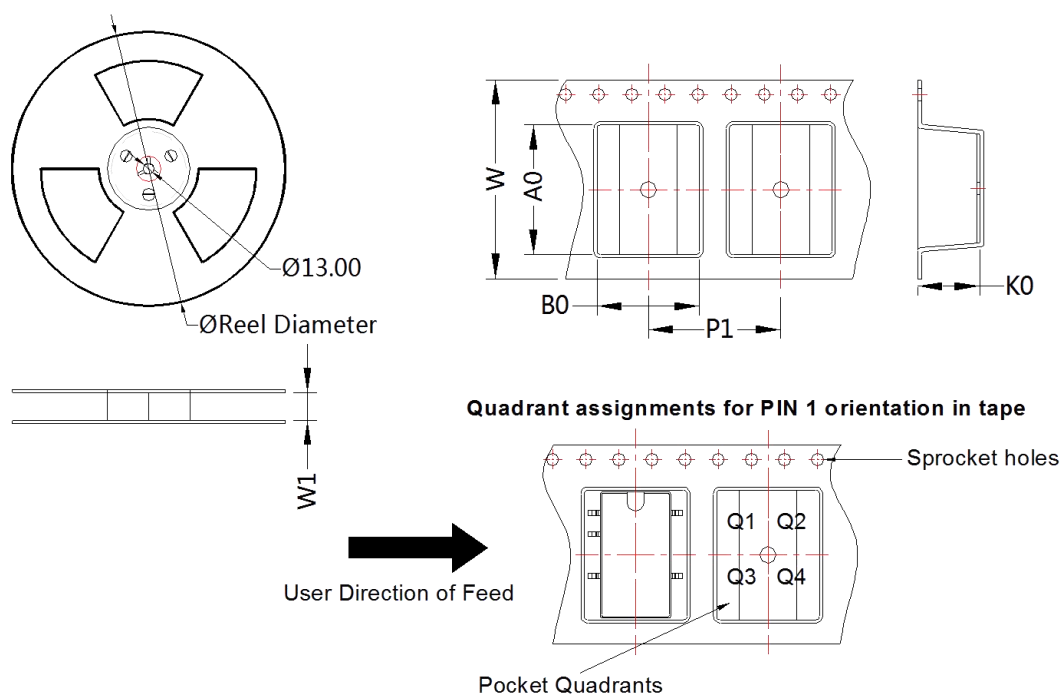

Device	Package Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
B_XT-1WR3	SMD	5	500	330.0	24.5	13.4	11.7	7.5	16.0	24.0	Q1

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com