


### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Excellent heat resistance and weather resistance are ensured by the use of metal glaze thick film
- High stability and high reliability with the triple-layer structure of electrode
- Suitable for both flow and reflow
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Tested: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (W2H), 2512 (W3A)

### dimensions and construction

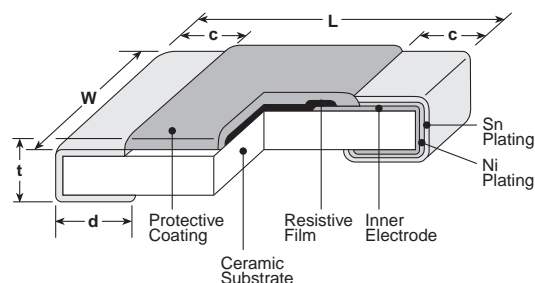

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
<b>1F</b> (01005)	.016±.001 (0.4±0.02)	.008±.001 (0.2±0.02)	.004±.001 (0.1±0.03)	.004±.001 (0.11±0.03)	.005±.001 (0.13±0.02)
<b>1H</b> (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
<b>1E</b> (0402)	.039 <sup>+0.004</sup> <sub>-0.002</sub> (1.0 <sup>+0.1</sup> <sub>-0.05</sub> )	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 <sup>+0.002</sup> <sub>-0.004</sub> (0.25 <sup>+0.05</sup> <sub>-0.1</sub> )	.014±.002 (0.35±0.05)
<b>1J</b> (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
<b>2A</b> (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 <sup>+0.008</sup> <sub>-0.004</sub> (0.3 <sup>+0.2</sup> <sub>-0.1</sub> )	.02±.004 (0.5±0.1)
<b>2B</b> (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 <sup>+0.008</sup> <sub>-0.004</sub> (0.4 <sup>+0.2</sup> <sub>-0.1</sub> )	.024±.004 (0.6±0.1)
<b>2E</b> (1210)		.102±.008 (2.6±0.2)			
<b>W2H</b> (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.026±.006 (0.65±0.15)	.024±.004 (0.6±0.1)
<b>W3A/ W3A2</b> (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)			

\* RK73Z exempt

### ordering information

RK73H	2A	R	T	TD	1002	F
<b>Type</b>	<b>Power Rating</b>	<b>Characteristic</b>	<b>Termination Material</b>	<b>Packaging</b>	<b>Nominal Resistance</b>	<b>Resistance Tolerance</b>
RK73B RK73H RK73Z	1F 1H 1E 1J 2A 2B 2E W2H W3A W3A2	R: Anti-Sulfur	T: Sn	TX: 4mm width - 1mm pitch plastic embossed TBL - TCM: 2mm pitch press paper ** TPL - TP: 2mm pitch punch paper TD: 4mm pitch punch paper TE: 4mm pitch plastic embossed Other nonstandard reel sizes available, contact factory for other options For further information on packaging, please refer to Appendix A	RK73B: 3 digits RK73H: 4 digits RK73Z: None	D: ±0.5% F: ±1% G: ±2% J: ±5%

\*\* Standard taping specification of 1H is TCM. Previously available "TC (10,000pcs/Reel)" is not recommended for new designs.

### applications and ratings

#### RK73B/RK73H

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/°C) Max.	Resistance Range				Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range																									
					RK73H		RK73B																													
					D±0.5% E24, E96	F±1% E24, E96 <sup>1</sup>	G±2% E24	J±5% E24																												
1F (01005)	0.03W	70°C	—	±200	—	100kΩ - 2MΩ <sup>2</sup>	100kΩ - 1MΩ	100kΩ - 10MΩ	20V	30V	-55°C to +125°C																									
				±250		10Ω - 91kΩ <sup>2</sup>	10Ω - 91kΩ	10Ω - 91kΩ																												
				0 - +300		—	1Ω - 9.1Ω	1Ω - 9.1Ω																												
1H (0201)	0.05W		70°C	125°C	±200	100Ω - 100kΩ	100Ω - 1MΩ	—	100 - 1M	25V		50V	-55°C to +155°C																							
					±300	—	10Ω - 97.6Ω		10Ω - 91Ω																											
1E (0402)	0.1W				70°C	125°C	±100	100Ω - 1MΩ	10Ω - 1MΩ	—		—		75V	100V	-55°C to +155°C																				
							±200	—	1.02MΩ - 10MΩ			10Ω - 10MΩ					1Ω - 10MΩ																			
1J (0603)	0.1W						70°C	125°C	±100	1.02kΩ - 1MΩ		1.02kΩ - 1MΩ		—	—		75V	100V	-55°C to +155°C																	
									±200	—		1.02MΩ - 10MΩ			1.1kΩ - 10MΩ					1.1kΩ - 10MΩ																
	0.125W								±100	100Ω - 1kΩ		10Ω - 1kΩ		—	—																					
									±200	—		10Ω - 1kΩ			1Ω - 1kΩ																					
2A (0805)	0.25W								70°C	125°C		±100		100Ω - 1MΩ	10Ω - 1MΩ		—	—		150V	200V	-55°C to +155°C														
		±200									—	1.02MΩ - 10MΩ		10Ω - 10MΩ	1Ω - 10MΩ																					
2B (1206)	0.25W	70°C									125°C	±100		100Ω - 1MΩ	10Ω - 1MΩ		—	—		200V	400V		-55°C to +155°C													
												±200		—	1.02MΩ - 10MΩ			10Ω - 10MΩ						1Ω - 10MΩ												
2E (1210)	0.5W		70°C	125°C								±100	100Ω - 1MΩ	10Ω - 1MΩ	—		—	200V						400V	-55°C to +155°C											
												±200	—	—			10Ω - 1MΩ									1Ω - 1MΩ										
W2H (2010)	0.75W				70°C	125°C						±100	10Ω - 1MΩ	10Ω - 1MΩ	—	—	200V									400V	-55°C to +155°C									
												±200	—	1 - 9.76 1.02MΩ - 10MΩ		1Ω - 10MΩ												1Ω - 10MΩ								
W3A (2512)	1W						70°C	125°C				±100	10Ω - 1MΩ	10Ω - 1MΩ	—	—			200V									400V	-55°C to +155°C							
												±200	—	1.02MΩ - 10MΩ		10Ω - 10MΩ														1Ω - 10MΩ						
W3A2 (2512)	2W <sup>2</sup>											70°C	125°C	±100	10Ω - 1MΩ	10Ω - 1MΩ														—	—	200V	400V	-55°C to +155°C		
														±200	—	1.02MΩ - 10MΩ															10Ω - 10MΩ				1Ω - 10MΩ	
W3A2 (2512)	2W <sup>2</sup>								95°C	125°C				±100	10Ω - 1MΩ	10Ω - 1MΩ						—								—	200V				400V	-55°C to +155°C
														±200	—	1.02MΩ - 10MΩ														10Ω - 10MΩ						

Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

<sup>1</sup>The nominal resistance value for RK73H1F (F:±1%) is E24

<sup>2</sup> If you use at the rated power, please keep the condition that the terminal of the resistor is below the rated terminal part temperature. Please refer to the derating curves based on the terminal temperature.

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," in your usage conditions, please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions to use on delivery specification before use.

### applications and ratings (continued)


#### RK73Z

Part Designation	Rated Ambient Temperature	Rated Terminal Part Temperature	Resistance	Current Rating	Maximum Surge Current	Operating Temperature Range
1H (0201)	+70°C	+125°C	100mΩ max.	0.5A	1A	-55°C to +155°C
1E (0402)			50mΩ max.	1A	2A	
1J (0603)				2A	5A	
2A (0805)			10A			
2B (1206)						
2E (1210)						
W2H (2010)						
W3A (2512)						


### environmental applications

#### Derating Curve


RK73B-RK73H-RK73Z-RT  
Ambient Temperature

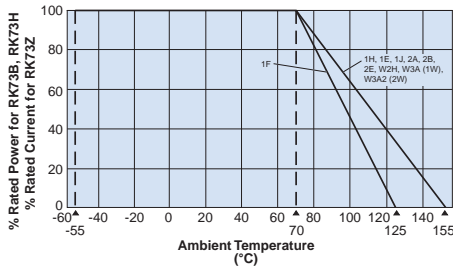

RK73B-RK73H-RK73Z-RT  
Terminal Part Temperature

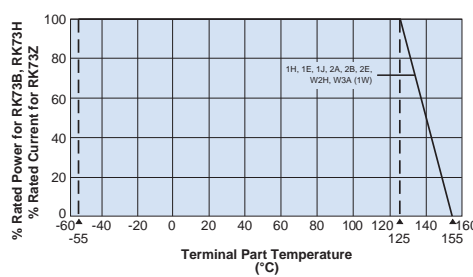

RK73B-RK73H-RT  
Terminal Part Temperature W3A2

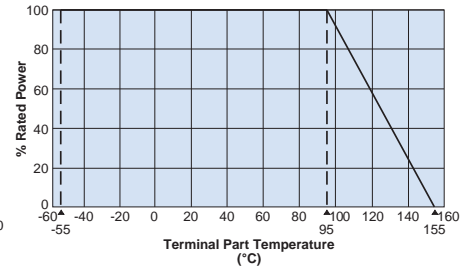


For resistors operated at an ambient temperature of 70°C or higher, the power (for RK73B, RK73H) or a current rating (for RK73Z) shall be derated in accordance with the above derating curve.

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.


Please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog before use.

#### Temperature Rise


RK73B 1F-1J




RK73B 2A-2E




RK73B W2H-W3A2




RK73H 1F-1J



RK73H 2A-2E




RK73H W2H-W3A2



Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

Measurement condition  
Room temperature: 25°C  
PCB: FR-4t = 1.6mm  
Cu foil thickness: 35µm









Please refer to conventional products for characteristic data such as temperature rise.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/04/24

### One-Pulse Limiting Electric Power

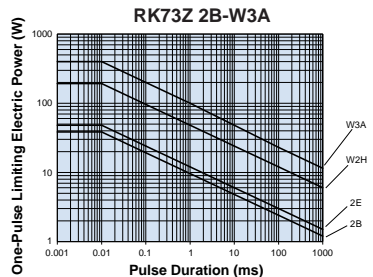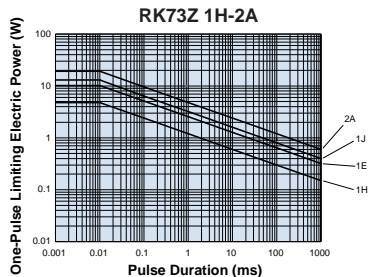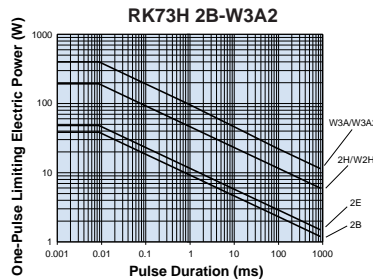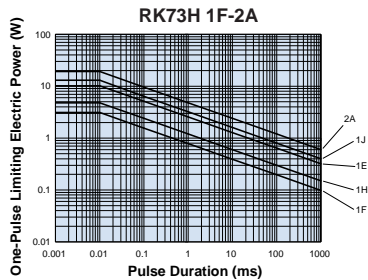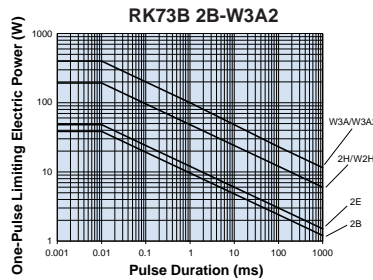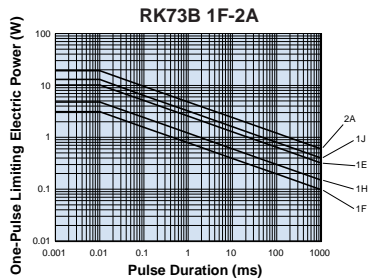

The maximum applicable voltage is equal to the max. overload voltage. Please ask us about the resistance characteristic of continuous applied pulse. The pulse endurance values are not assured values, so be sure to check the products on actual equipment when you use them.

Please ask us about the resistance characteristic of continuous applied pulse. Please calculate One-Pulse Limiting Electric Power using upper limit of resistance (50mΩ or 100mΩ) for applied current. The pulse endurance values are not assured values, so be sure to check the products on actual equipment when you use them.

## environmental applications

### Performance Characteristics

Parameter	RK73H, RK73B Requirement $\Delta R$ $\pm(\%+0.1\Omega)$		RK73Z Requirement		Test Method
	Limit	Typical	Limit	Typical	
Resistance	Within specified tolerance	—	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	$R \leq 90m\Omega$ : 1H $R \leq 40m\Omega$ : All others	25°C
T.C.R.	Within specified T.C.R.	—	—	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	$\pm 2\%$	$\pm 1\%$ : 1F $\pm 0.8\%$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	$R \leq 90m\Omega$ : 1H $R \leq 40m\Omega$ : All others	RK73B, RK73H Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds) RK73Z: Max. overload current for 5 seconds
Resistance to Solder Heat	$\pm 1\%$ : $10\Omega \leq R \leq 1M\Omega$ $\pm 3\%$ : $R < 10\Omega$ , $R > 1M\Omega$	$\pm 1\%$ : $R < 10\Omega$ , $R > 1M\Omega$ $\pm 0.5\%$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	$R \leq 90m\Omega$ : 1H $R \leq 40m\Omega$ : All others	260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second
Rapid Change of Temperature	$\pm 1\%$ : 1F $\pm 0.5\%$ : All others	$\pm 0.5\%$ : 1F $\pm 0.3\%$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	$R \leq 90m\Omega$ : 1H $R \leq 40m\Omega$ : All others	-55°C (30 minutes) / +125°C (30 minutes), 100 cycles
Moisture Resistance	$\pm 2\%$ : 1J, 2A, 2B $\pm 3\%$ : All others	$\pm 0.75\%$ : 1J, 2A, 2B $\pm 1.5\%$ : 1F $\pm 1\%$ : All others	$R \leq 150m\Omega$ : 1H $R \leq 100m\Omega$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	40°C $\pm$ 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 2\%$ : 1J, 2A, 2B $\pm 3\%$ : All others	$\pm 0.75\%$ : 1J, 2A, 2B $\pm 1\%$ : All others	$R \leq 150m\Omega$ : 1H $R \leq 100m\Omega$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	70°C $\pm$ 2°C or rated terminal part temperature $\pm$ 2°C 1000h 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	$\pm 1\%$	$\pm 0.5\%$	$R \leq 150m\Omega$ : 1H $R \leq 100m\Omega$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1H, 1E, 1J, 2A, 2B, 2E, W2H, W3A
Sulfuration Test	$\pm 5\%$	$\pm 0.3\%$ : 1F, 1H $\pm 0.2\%$ : All others	$R \leq 150m\Omega$ : 1H $R \leq 100m\Omega$ : All others	$R \leq 100m\Omega$ : 1H $R \leq 50m\Omega$ : All others	Soaked in industrial oil with 3.5% sulfur concentration 105°C $\pm$ 3°C, 500 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/04/24